



## Executive HD Overview: Refer to Executive HD Installation and Operation Guide on <https://uc.yamaha.com>

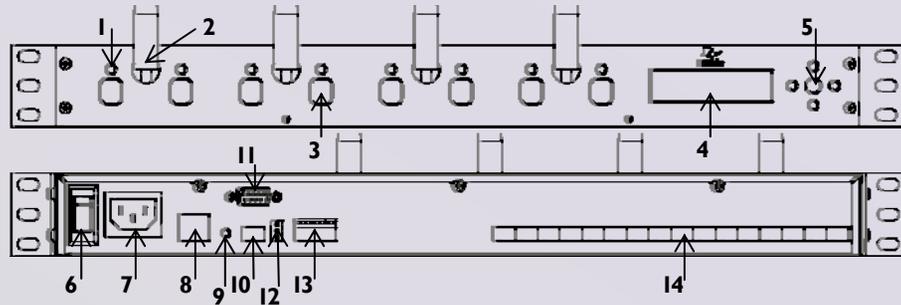

1. Channel LED indicators: Displays microphone mute and pairing states
2. Diversity Antenna: One or two sets (4 channel or 8 channel)
3. Pairing Push Buttons: For pairing microphones to Base Station
4. Two Line LCD Display for front panel operation, command and control
5. Navigation Buttons for menus on front panel LCD interface
6. Reset On/Off Switch: Powers up unit
7. Power In Receptacle (100-240 VAC)
8. Ethernet Port
9. System Reset Button
10. Mini-Phoenix Connector: Multiple Base Station (BUS) synchronization connection
11. RS-232 Serial Interface, DB9
12. Base station status LEDs
13. Configuration DIP Switches
14. Mini-Phoenix Connectors: Balanced Audio in and out connections (4 or 8 channels)

Configuring DIP Switches



DIP Switch	Feature	Off (Default)	On
1	Multiple System Operation Mode	Primary	Secondary
4	Audio Output Level	Line ~0 dBu	Mic ~ 40 dBu

Regulatory Information (full information in Installation and Operation Guide)

FCC Registration Number: 0014898290



RF ETSI EN 301 406 V 1.4.1 03/2001  
EMC ETSI EN 301 489-6 v1.2.1 (2002-04)

Technical Support: <https://uc.yamaha.com/resources/support/>



Copyright 2018 Yamaha Unified Communications, Inc.

## Box Contents

NOTE: Revolabs Wireless Microphones Ship in Separate Boxes



Executive HD Base Station (4 or 8 Channel) and 2 or 4 Diversity Antenna (shown attached)



Charger Base (4 or 8 Channel)



Universal power supply and plug for Charger Base



Power Cord for Base Station




8 or 16 Phoenix Connectors



USB Cable to Charger Base for Microphone Firmware Upgrades

## How to Assemble

1. Rack-mount Executive HD Base Station
2. Attach the diversity antennas (2 or 4 SMA female connectors)
3. Wire mini-Phoenix connectors with appropriate 3 conductor cable
4. Plug the power cord into Base Station and appropriate electrical outlet
5. Turn on the unit using the power switch on the back panel
6. Plug power adapter into Charger Base and appropriate electrical outlet
7. Pair Revolabs Wireless Microphones to Base Station using the pairing instructions
8. Place microphones into Charger Base
9. Download the HD Control Panel software and firmware updates from <https://uc.yamaha.com/resources/support/>



**PHANTOM POWER MUST BE OFF. PHANTOM POWER MAY CAUSE DAMAGE TO THE BASE STATION**



SHARING PASSION & PERFORMANCE

Yamaha Unified Communications, Inc.  
144 North Road #3250  
Sudbury, MA 01776 USA  
+1 800-326-1088  
[uc-sales@music.yamaha.com](mailto:uc-sales@music.yamaha.com)

Yamaha UC EMEA  
190 High Street Tonbridge, Kent  
TN9 1BE, UK  
+44 (0)1732 366535  
[uc-salesemea@music.yamaha.com](mailto:uc-salesemea@music.yamaha.com)

Yamaha UC APAC  
+852.8108.8820  
[uc-salesapac@music.yamaha.com](mailto:uc-salesapac@music.yamaha.com)